

UPWARD-ACTING SECTIONAL DOORS & OPERATORS

Clopay

PRO·SERIES®

COMMERCIAL

COMMERCIAL

doors

083600/CLO
BUYLINE 32688





COMMERCIAL doors

WHY CLOPAY?

Heavy-duty upward-acting sectional doors, including polyurethane and polystyrene insulated, steel pan, aluminum full view and specialty models, are ideal for a wide variety of commercial, industrial and institutional projects. Long-lasting, dependable service makes Clopay® sectional doors an economical choice, while the many customized options available enable you to meet virtually any application requirement.

3700 SERIES

Polyurethane Insulated Steel Sectional Doors

Climate control. Durability. Dependability. Our premier Model 3700 Series has it all, providing excellent temperature control, maximum energy efficiency and long-lasting service for a wide range of applications, such as firehouses, warehouses and municipal buildings.



- “Sandwich” construction – foamed-in-place 1-3/8”, 1-3/4” or 2” polyurethane core, with steel backer plates on the inner skin – provides maximum strength and energy efficiency inside and out
- Tongue-and-groove section joint for exceptional strength and thermal sealing
- Our three-stage prepainting process assures a durable, maintenance-free finish inside and out

- Attractive stucco-embossed steel skins
- Foamed-in-place polyurethane adds R-value up to 17.2*
- Door includes hardware, track and springs
- Ten-year paint and delamination warranty

3000 SERIES

Polystyrene Insulated Steel Sectional Doors

These high-quality, insulated thermally broken steel doors provide energy efficiency and long service under demanding conditions. Ideal for use in municipal buildings, warehouses and shipping dock applications, or where energy efficiency is needed.



- R-value up to 12.15*
- Attractive stucco-embossed, textured skin (3150, 3200, 3220 and 3300)
- Aesthetic raised panel design featuring woodgrain embossing (3154 and 3213)
- Prepainted inside and out for a durable, maintenance-free finish
- Ten-year warranty against rust-through

500 SERIES

Ribbed or Raised Panel Steel Sectional Doors

Premium-duty 20 gauge (520 and 520S) and heavy-duty 24 gauge (524, 524V and 524S) doors are for most commercial and industrial applications. Models 525, 525V and 525S are alternatives for applications requiring economy and reliability in a lighter gauge commercial door. Ideal for use in service stations, auto dealerships and warehouses.



- Clopay's 20, 24 and 25 gauge steel sectional doors are prepainted inside and out for a maintenance-free, durable finish
- Tog-L-Loc® construction eliminates welds and rivets for rust-proof and leak-proof joints
- Available in prepainted White or Brown
- Available with insulation for maximum energy efficiency
- Ten-year warranty against rust-through
- Available with prepainted, full view light section(s)

900 SERIES

Full View Aluminum Sectional Doors

Standard exterior and “partitioned” interior applications such as service stations, auto dealerships and restaurants that require high light transmission and visibility are satisfied by our durable and attractive Model 903.



- Unique “capped rail” construction for superior weather sealing
- Integral reinforcing fin adds durability and strength
- Standard finishes include White or Brown prepainted or Clear, anodized aluminum
- Available in a wide variety of powder coated and Anodized finish colors
- Many glazing options available, including thermal glass and polycarbonate panels in various colors

*Calculated door section R-value is in accordance with DASMA TDS-163.



COMMERCIAL MOTOR OPERATORS

- Model GH – Gearhead Jackshaft Operator
- Model GT – Gear Driven Trolley Operator
- Models H and J – Belt-Drive Jackshaft Operators
- Models MJ and MH – Medium-duty Jackshaft Operators
- Model MT – Medium-duty Trolley Operator
- Model T – Heavy-duty Trolley Operator




PEDESTRIAN PASS DOOR OPTION

Clopay's Walk-through (Pass) Doors are the perfect complement to any standard door to increase functionality while providing security where that is an issue.



- 32" x 80" door, 3-1/2 sections high
- Welded aluminum frame with shiplap configuration
- Frame painted to match door color: available in White, Brown, Tan or Gray
- Continuous geared hinge for smooth and quiet operation
- 2" x 3" aluminum box rail for bottom rail support

- Rain gutter over door to channel water around door
- Dorma® door closer; adjustable for right or left hinged door
- Night latch lock with cylinder



REMOVABLE CENTER MULLION

For openings that are wider than standard door width, consider using a carry-away, or roll-away, or swing-up mullion that enables two (2) or more doors to fill one opening.

BREAK-AWAY BOTTOM OPTION

Clopay's Break-Away Bottom Section will release from the track and swing up to a full 90 degree angle inward or outward, preventing further damage to the door. The bottom section can be "snapped" back into place in less than a minute.



- Available on the 1-3/4" and 2" thick 3000/3700 Series polystyrene and polyurethane insulated products, and the 524 and 520 Series ribbed steel doors
- Available in single sections up to 20 feet wide and double sections up to 14 feet wide.

Polyurethane Insulated Steel Sectional Doors

Stucco Embossed

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height	R-value
1-3/8" Ribbed	3715	27 ga.	.016"	18'2"	16'0"	12.9
1-3/4" Ribbed	3717	27 ga.	.016"	32'2"	26'0"	15.05
1-3/4" Flush	3718	27 ga.	.016"	32'2"	26'0"	15.05
2" Ribbed	3720	27 ga.	.016"	32'2"	26'0"	17.2
2" Flush	3722	20 ga.	.034"	32'2"	26'0"	17.2

Polystyrene Insulated Steel Sectional Doors

Stucco Embossed

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height	R-value
1-3/8" Ribbed	3150	27 ga.	.016"	18'2"	16'0"	6.5
2" Ribbed	3200	24 ga.	.022"	26'2"	24'0"	9.1
2" Flush	3220	20 ga.	.034"	28'2"	26'0"	9.1
3" Ribbed	3300	25 ga.	.019"	28'2"	26'0"	12.15

Polystyrene Insulated Steel Sectional Doors

Woodgrain Embossed

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height	R-value
1-3/8" Raised	3154	27 ga.	.016"	16'2"	16'0"	6.5
1-3/8" Flush	3155	27 ga.	.016"	16'2"	16'0"	6.5
2" Raised	3213	24 ga.	.022"	20'2"	18'0"	9.1
2" Flush	3211	24 ga.	.022"	20'2"	18'0"	9.1

Steel Sectional Doors

Ribbed or Raised Panel

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height	R-value
2" Standard	525	25 ga.	.019"	20'2"	16'0"	
2" Heavy-Duty	524	24 ga.	.022"	24'2"	20'0"	
2" Premium	520	20 ga.	.034"	26'2"	20'0"	
2" Standard	664	24 ga.	.0122"	20'2"	18'0"	

Polystyrene Insulated Steel Sectional Doors

Steel or Vinyl Back Cover

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height	R-value
2" Standard	525S	25 ga.	.019"	20'2"	16'0"	6.6
2" Heavy-Duty	524S	24 ga.	.022"	24'2"	20'0"	6.6
2" Premium	520S	20 ga.	.034"	26'2"	20'0"	6.6
2" Heavy-Duty	664V	24 ga.	.022"	20'2"	18'0"	

Aluminum Sectional Doors

Chain Link/Screen/Full View


Description	Model Number	Pane Material	Std. Max. Width	Std. Max. Height	R-value
1-1/2" Security	811	11 ga. Chain Link	24'2"	18'0"	
1-1/2" Premium	812	304 Stainless Steel	24'2"	18'0"	
2" Premium	903	Various Glazing	24'2"	20'0"	

Insulated Doors available with hair cell polystyrene (vinyl) back cover. Vinyl backer is designated by substituting a "V" for the final "S" in the model number. For example: Model 525V.


For complete specifications please refer to www.clopaycommercial.com

TRACK & FRAMING DETAILS


Standard Radius




Low Headroom Front Mount




Low Headroom Rear Mount




High Lift



Roof Pitch

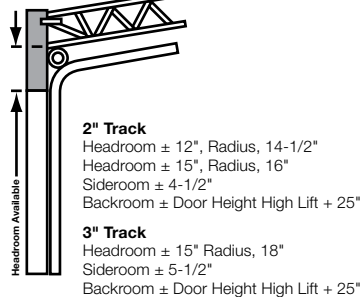

Vertical Lift



DOOR OPTIONS




Exhaust Port
Can be cut into any type of sectional door.




Full View Aluminum Sash
Various glazing options available.




Double End Hinge
Standard on large doors, optional on small doors.




24" x 12" Polypropylene Frame Window
Double strength or insulated glass.



24" x 8" Polypropylene Frame Window
Double strength or insulated glass.



Spring Bumpers
Standard on high lift and vertical lift tracks, optional on standard radius and low headroom tracks.



Long Life Springs
25,000, 50,000 or 100,000 cycle springs available.

DISTRIBUTED BY:



For more information on these and other Clopay products, call 1-800-526-4301 or visit www.clopaycommercial.com



See us in Sweet's
CD CD/CAD Online Catalog Files



Clopay has been at the forefront of code compliant sectional door products for decades. From research and development to design assistance, Clopay is your source for WINDCODE® products. Clopay offers a variety of wind-loaded products in many different sizes and pressure ratings. Our continued emphasis on this important issue puts Clopay ahead of the competition. Some of the benefits we can offer you include:

- Professional engineering staff
- Design recommendations
- In-house testing facilities
- Third-party independent testing verifications
- Construction industry approvals: South Florida, Standard Building Code Congress, Texas Department of Insurance, North Carolina Building Code Council
- In-house research and development at Clopay Building Products Technical Center in Cincinnati, Ohio
- Dedicated building code product manager on staff

CIA (Commercial Information Assistance)

Our CIA team is dedicated to providing the information you need to design and then provide the rolling or sectional door products for your projects, including:

- Specifications in CSI MasterFormat™
- AutoCAD® details or Revit® B.I.M. product information
- LEED® project information and details
- Product features and options
- Special applications

CONTACT CIA

Phone: 800-526-4301 opt. #3

Fax: 888-434-3193

e-mail: CIA@clopay.com

1-800-526-4301